

MDE Semiconductor, Inc.

78-150 Calle Tampico, Unit 210, La Quinta, CA., USA 92253 Tel : 760-564-8656 • Fax : 760-564-2414

1-800-831-4881 Email: sales@mdesemiconductor.com Web: www.mdesemiconductor.com


MAXPak™ Series

MAX-225

HIGH CURRENT TRANSIENT VOLTAGE SUPPRESSOR

FEATURES

- **10KA Surge Capability @ 8 x 20 µsec waveform** (per IEC- 61000-4-5)
- UL 1449 Pending
- Peak Power Dissipation 324KW
- Bi-directional
- Excellent clamping capability
- Repetition rate (duty cycle): 0.05%
- Sharp breakdown voltage
- Low incremental surge resistance
- Fast response time: typically less than 1.0 µs from 0 Volts to BV
- Operation temperature: -40°C to +125°C
- Epoxy encapsulated package has Underwriters Laboratory Flammability Classification 94 V-0

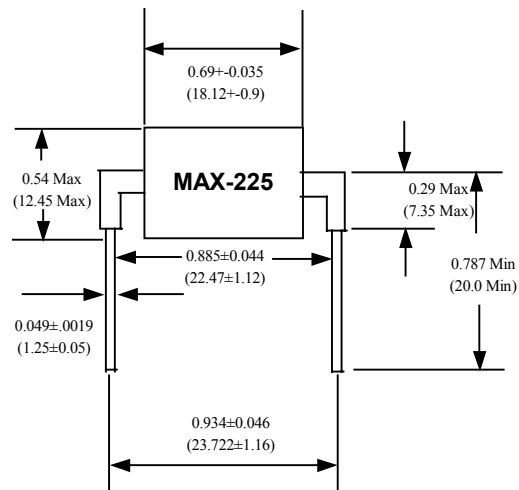

Dimensions in inches
and
(Millimeters)

MECHANICAL DATA

Terminal: Ag Plated Axial leads, solderable per MIL-STD-750. Method 2026

Mounting Position: Any

Weight: 0.408 \pm 0.040 ounces (11.300 \pm 1.130g)

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25° C ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNITS
Reversed Standoff Voltage	V _{rw}	202.5	Volt
Breakdown Voltage @ I _T =1.0mA	V _{br}	225 \pm 5%	Volt
Clamping Voltage @ 1090A / 10x1000 µsec waveform	V _c	297 max	Volt
Reverse Leakage @ 202.5V	I _R	20 µ max	A

MAXPak™ 225 Series Curves

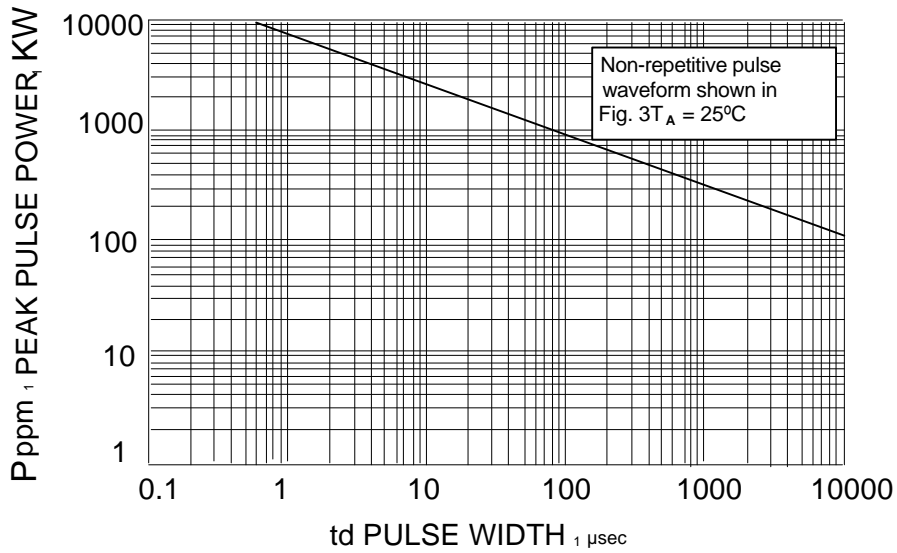


FIG. 1 PEAK PULSE POWER RATING

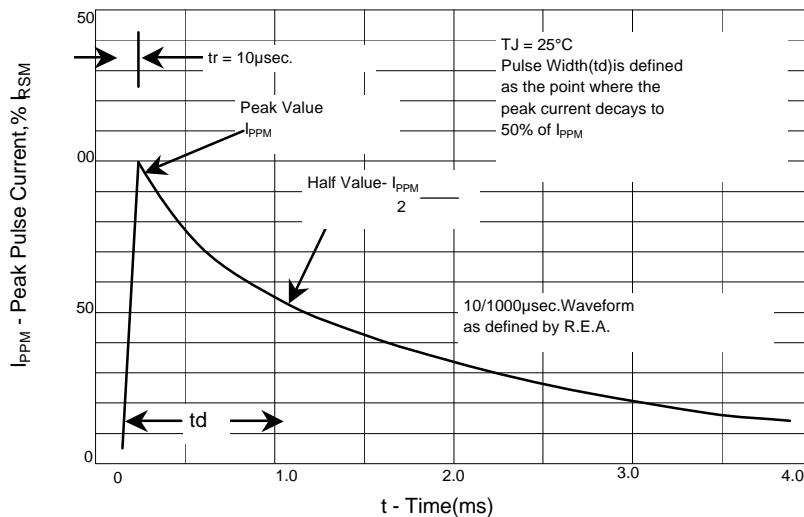
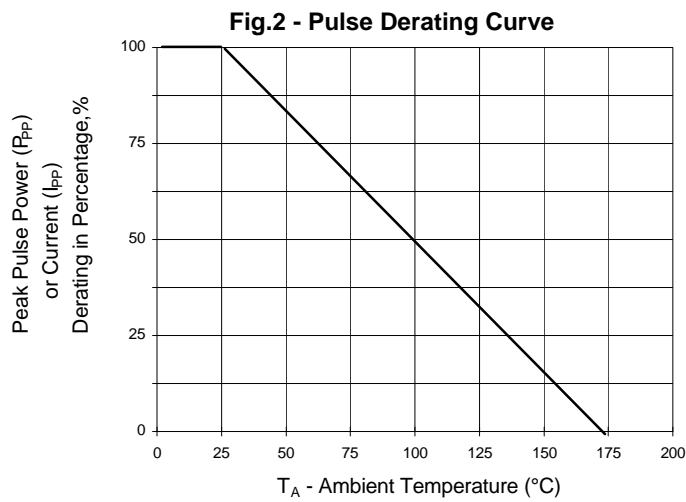


Fig.3 - Pulse Waveform